
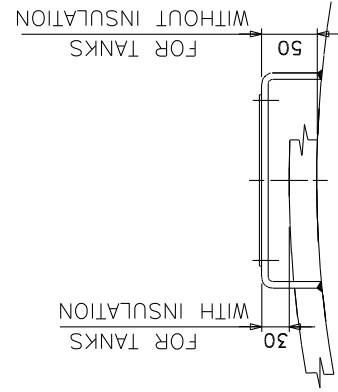
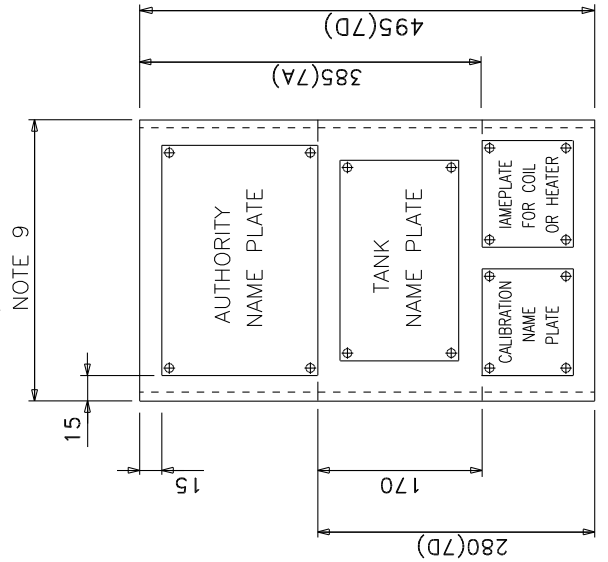


GENERAL NOTES

1. ALL NAMEPLATES TO BE PURCHASED AND FILLED OUT BY TANK VENDOR.
MATERIAL: AISI 304
"FACES" BLANK AND POLISHED
"BACKGROUND" ETCHED AND PAINTED BLACK
2. LETTERS AND FIGURES IN POLISHED SURFACE TO BE CLEARLY ENGRAVED. HEIGHT OF LETTERS TO BE 4mm.
3. DATA TO BE PUT ON BY MEANS OF ENGRAVING OR HARD STAMPING IN THE ENGLISH LANGUAGE.
4. ATTACHMENT OF NAMEPLATES BY MEANS OF BRASS RIVETS.
5. BRACKET TO BE THE SAME TYPE OF MATERIAL AS THE TANK WALL. THICKNESS OF BRACKET 6mm.
6. IF THE TANK PART WHERE THE BRACKET IS ATTACHED TO IS POST WELD HEAT TREATED, THE BRACKET SHALL BE WELDED TO THE TANK PRIOR TO POST WELD HEAT TREATMENT.
7. HEIGHT OF BRACKET SHALL BE AS FOLLOWS:
A. 385mm IF AUTHORITY NAMEPLATE IS ONLY USED.
B. 495mm IF CALIBRATION OR COIL NAMEPL. IS ALSO USED.
C. 170mm IF TANK NAMEPLATE IS ONLY USED.
D. 270mm IF COIL NAMEPLATE IS ALSO USED.
8. ELEVATION AS GIVEN ON REQUISITION IS BOTTOM OF BRACKET.
9. DEPENDING ON LARGEST NAMEPLATE.

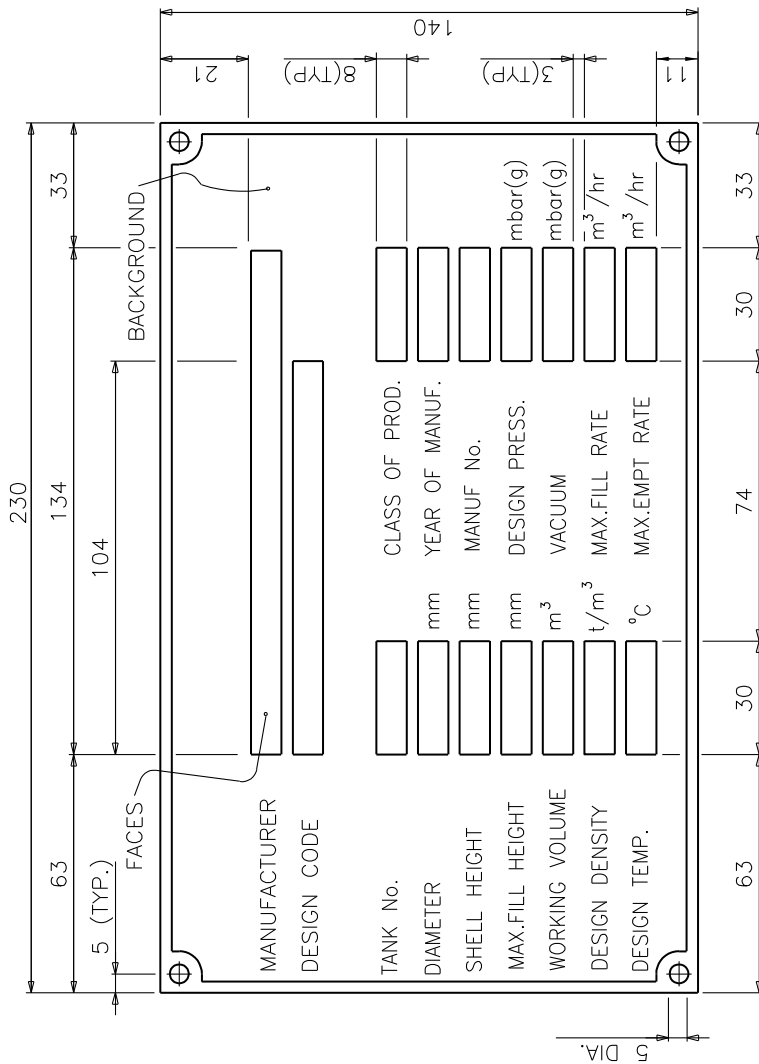

NAMEPLATE 2mm THK.

SEE NOTE 5